




# >> FV35

## Pillar terminal block (12 poles)




### Technical data

	IEC STANDARDS	AMERICAN STANDARDS
<b>Ratings</b>	450V - 24A	300V - 6A
<b>Wire size</b>	2.5 sqmm	20 ÷ 18 AWG (3.0 lb/in)
<b>Working Temperat.</b>	- 5 ÷ 150°C (short time 180°C)	23 ÷ 239°F
<b>Plastic Material</b>	Polyamide glass fibre reinforced, UL94 VO, GWIT 775°C, GWFI 850°C	
<b>Metal Parts</b>	Cage insert made in nickel plated brass; M3 (0.5Nm) Captive screw made in zinc plated steel	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E2678	2.5 sqmm - 450V - 150°C	EN 60998-1; EN 60998-2-1
	40021011	2.5 sqmm - 450V - 24A - 150°C	EN 60998-1; EN 60998-2-1 (VDE 0613)
	E76048 vol. 1, sec. 1	20 ÷ 18 AWG - 300V - 6A - 115°C	UL 1059; C22-2 N. 158-1987

### Dimensional drawing

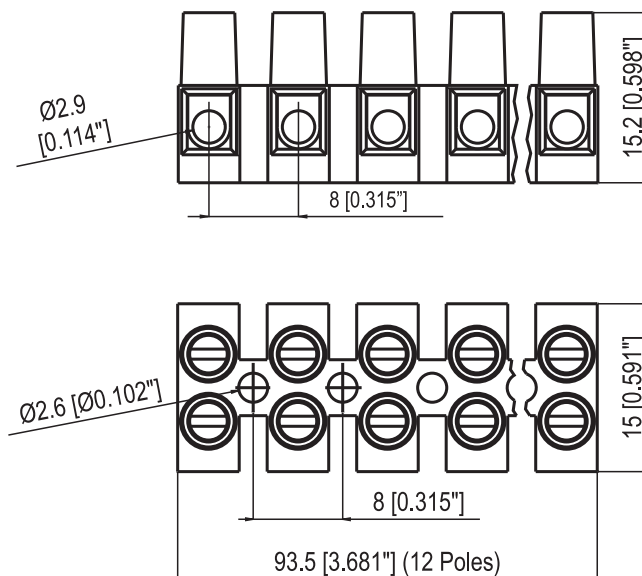

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

