




>> PA220

Pillar terminal block (12 poles)




Technical data

	IEC STANDARDS	AMERICAN STANDARDS
Ratings	750V - 76A	300V - 80A
Wire size	16.0 sqmm	18 ÷ 6 AWG (7.0 lb/in)
Working Temperat.	- 5 ÷ 110°C (short time 140°C)	23 ÷ 221°F
Plastic Material	Polyamide, UL94 V2, GWIT 775°C, GWFI 850°C	
Metal Parts	Cage insert made in nickel plated brass; M5 (2.0Nm) Captive screw made in zinc plated steel	
Accessories	PA52	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	CA02.00594	16.0 sqmm - 750V - 110°C	EN 60998-1; EN 60998-2-1
	EQ109	16.0 sqmm - 750V - 85°C	EN 60998-1; EN 60998-2-1
	40020949	16.0 sqmm (rigid) / 10.0 sqmm (flex.) - 750V - 76A - 110°C	EN 60998-1; EN 60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 8	18 ÷ 6 AWG - 300V - 80A - 105°C	UL 1059; C22-2 N.158-1987

Dimensional drawing

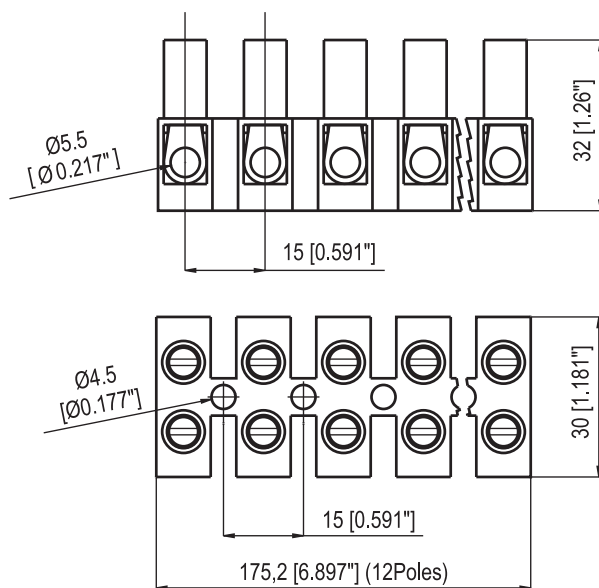

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

