





PA255 - 5

**Rising clamp terminal block,
angled entry 45°**




TECHNICAL DATA

	IEC	UL / CSA
Pitch	5 mm	0.19"
Poles	2, 3	
Versions	angled 45°	
Ratings	250V - 16A	300V - 15A
Wire size	2.5 sqmm	26 ÷ 14 AWG
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C	
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel	
Screw Torque	0.5 Nm	7 lb-in
Accessories	CAR-IND	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EN 4332	2.5sqmm - 250V - 16A - 85 °C	EN60998-1; EN60998-2-1
	121272 ÜG	2.5sqmm - 250V - 16A - 85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 7	26 ÷ 14AWG - 300V - 15A - 140 °C	UL1059

DIMENSIONAL
DRAWING

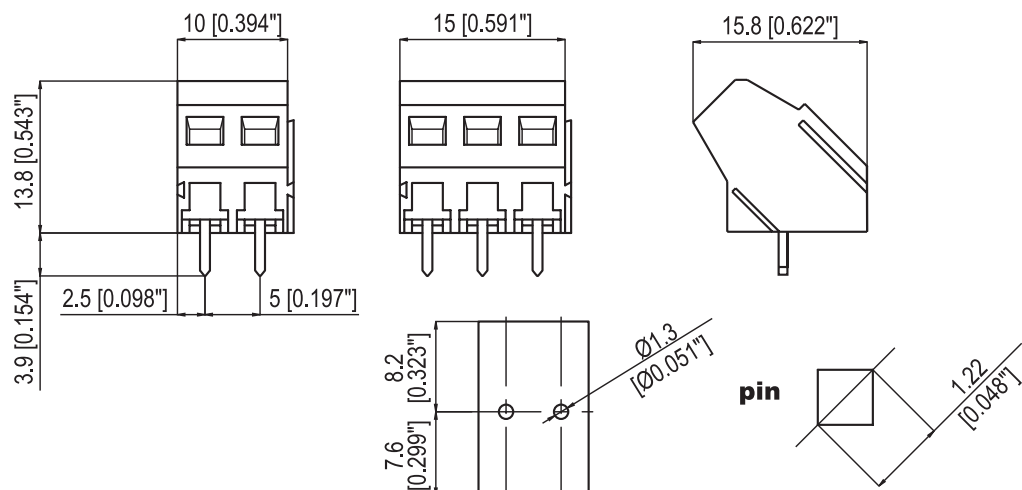





PA255 – 5

ACCESSORIES

CAR-IND

Self adhesive label of ten symbols.
Package of 10 sheets each with 25 labels.



PACKAGING

Type	P-N	Pack
PA 255/5/2	00112902	100
PA 255/5/3	00112903	100

CAR-IND

Type	P-N	Pack
L1, L2, L3, N, PE, U, V, W, N,	00080498	250
Neutral	00080499	250
1+ 10	00080500	250
11+ 20	00080501	250
21+ 30	00080502	250
31+ 40	00080503	250
41+ 50	00080504	250
51+ 60	00080505	250
61+ 70	00080506	250
71+ 80	00080507	250
81+ 190	00080508	250
91+ 100	00080509	250

PALLETS


Europallets








PA255 - 10

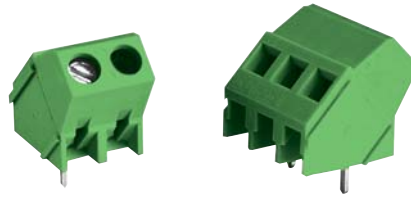**Rising clamp terminal block,
angled entry 45°**




TECHNICAL DATA

	IEC	UL / CSA
Pitch	10 mm	0.39"
Poles	1, 2	
Versions	angled 45°	
Ratings	250V - 16A	300V - 15A
Wire size	2.5 sqmm	26 ÷ 14 AWG
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C	
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel	
Screw Torque	0.5 Nm	7 lb-in
Accessories	CAR-IND	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EN 4332	2.5sqmm - 250V - 16A - 85 °C	EN60998-1; EN60998-2-1
	121272 ÜG	2.5sqmm - 250V - 16A - 85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 7	26 ÷ 14AWG - 300V - 15A - 140 °C	UL1059

DIMENSIONAL
DRAWING

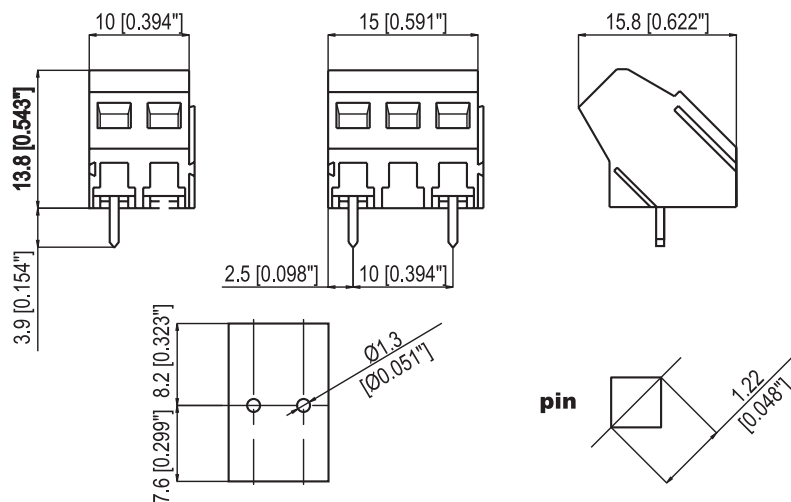





PA255 – 10

ACCESSORIES

CAR-IND

Self adhesive label of ten symbols.
Package of 10 sheets each with 25 labels.



PACKAGING

Type	P-N	Pack
PA 255/10/1	00112971	100
PA 255/10/2	00112972	100

CAR-IND

Type	P-N	Pack
L1, L2, L3, N, PE, U, V, W, N,	00080498	250
Neutral	00080499	250
1+ 10	00080500	250
11+ 20	00080501	250
21+ 30	00080502	250
31+ 40	00080503	250
41+ 50	00080504	250
51+ 60	00080505	250
61+ 70	00080506	250
71+ 80	00080507	250
81+ 190	00080508	250
91+ 100	00080509	250

PALLETS

Europallets

