




# PA258 S - 5


Rising clamp terminal block



## TECHNICAL DATA

	IEC	UL / CSA	
Pitch	5 mm	0.19"	
Poles	2, 3		
Versions	VE vertical		
Ratings	250V - 10A	300V - 16A	
Wire size	1.5 sqmm	30 ÷ 14 AWG	
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F	
Plastic Material	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C		
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel		
Screw Torque	0.5 Nm	2.5 lb-in	
Accessories			
Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E76048 vol.1 sec. 16	30 ÷ 14 AWG - 300V - 16A - 140 °C	UL1059; CSA C22-2 N.158-1987

DIMENSIONAL DRAWING

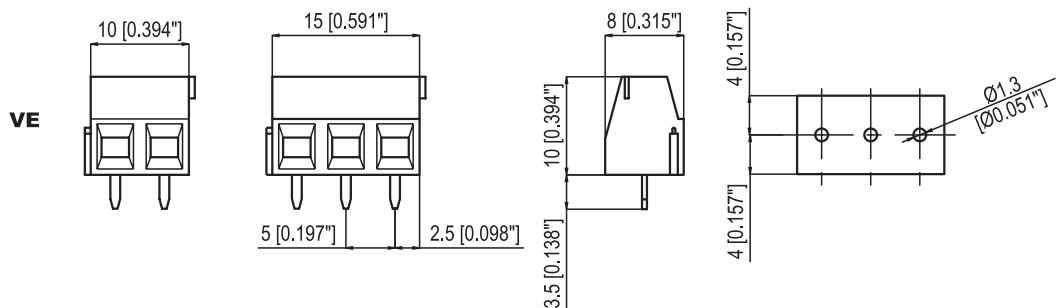



# PA258 S - 5

PACKAGING		
Type	P-N	Pack
PA 258S/5/2VE	00115102	500
PA 258S/5/3VE	00115103	250

PALLETS	
Europallets	






# PA258 S - 10

Rising clamp terminal block




## TECHNICAL DATA

	IEC	UL / CSA
<b>Pitch</b>	10 mm	0.39"
<b>Poles</b>	1, 2	
<b>Versions</b>	VE vertical	
<b>Ratings</b>	250V - 10A	300V - 16A
<b>Wire size</b>	1.5 sqmm	30 ÷ 16 AWG
<b>Working Temperature</b>	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 284 °F
<b>Plastic Material</b>	Green Polyamide PA6.8, UL94-V0, CTI600V, GWT960 °C	
<b>Metal Parts</b>	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M3 Screw made in zinc plated steel	
<b>Screw Torque</b>	0.5 Nm	2.5 lb-in
<b>Accessories</b>		

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E76048 vol.1 sec. 16	30 ÷ 16 AWG - 300V - 16A - 140 °C	UL1059; CSA C22-2 N.158-1987

DIMENSIONAL DRAWING

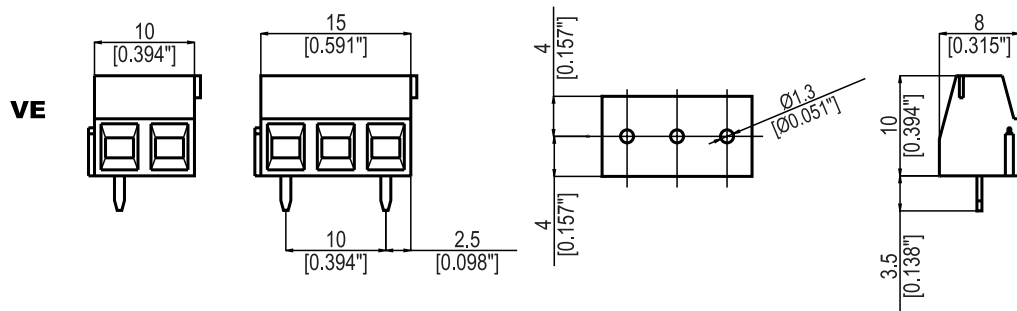



# PA258 S – 10

PACKAGING		
Type	P-N	Pack
PA 258S/10/1VE	00115131	500
PA 258S/10/2VE	00115132	250

PALLETS	
Europallets	