




>> PA27 wp

**Pillar terminal block
with Wire Protector
(12 poles)**




Technical data

	IEC STANDARDS	AMERICAN STANDARDS
Ratings	450V - 24A	300V - 15A
Wire size	2.5 sqmm	18 ÷ 14 AWG (8.0 lb/in)
Working Temperat.	- 5 ÷ 125°C (short time 155°C)	23 ÷ 221°F
Plastic Material	Polyamide, UL94 V2, GWIT 775°C, GWFI 850°C	
Metal Parts	Cage insert made in nickel plated brass; M3 (0.5Nm) Captive screw made in zinc plated steel; Wire protector made in stainless steel	
Accessories	PA36 - PA37 - PA295 - PA228 - PA52 - PA197	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	CA02.01048	2.5 sqmm - 450V - 125°C	EN 60998-1; EN 60998-2-1
	E2672	2.5 sqmm - 450V - 85°C	EN 60998-1; EN 60998-2-1
	40013746	2.5 sqmm - 450V - 24A - 125°C	EN 60998-1
			EN 60998-2-1 (VDE 0613)
	E76048 vol. 1 sec. 1	18 ÷ 14 AWG - 300V - 15A - 105°C	UL 1059; C22-2 N.158-1987

Dimensional drawing

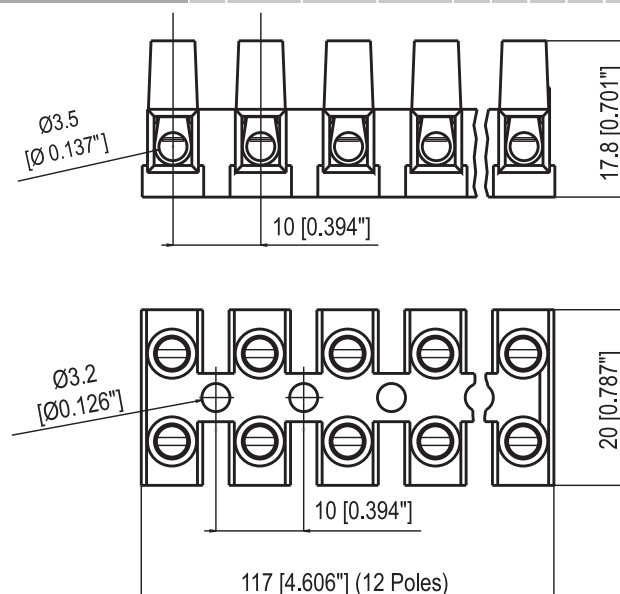

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

